


Tuercas en pulgadas

- **TUERCA HEXAGONAL CORRIENTE G2** SEGUN NORMA SAE J-995 SERIE DE ROSCAS UNC-UN EQUIVALENTE A NORMA ASTM A-563 GRADO A



D	#5(1/8)	#8(5/32)	10(3/16)	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1	1.1/8	1.1/4	1.1/2	1.3/4	2
PASO HILO DTC.	40	32	24	20	18	16	14	13	12	11	10	9	8	7	7	6	5	4.5
PASO HILO END.	40	32	24	28	24	24	20	20	18	18	16	14	12	-	-	-	-	-
H Máx	2.90	3.30	3.30	5.74	6.93	8.56	9.78	11.38	12.60	14.20	16.89	19.71	22.53	25.37	27.79	33.45	39.10	44.78
F Nom	5/16" (7.92)	11/32" (8.74)	3/8 (9.53)	7/16" (11.13)	1/2" (12.70)	9/16" (14.27)	11/16" (17.48)	3/4" (19.05)	7/8" (22.23)	15/16" (23.83)	1.1/8" (28.58)	1.5/16" (33.32)	1.1/2" (38.10)	1.11/16" (42.88)	1.7/8" (47.63)	2.1/4" (57.15)	2.5/8" (66.68)	3" (76.20)

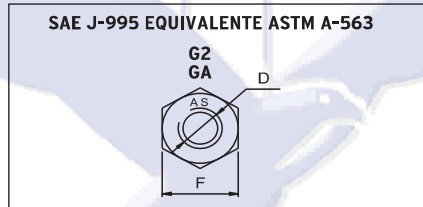